

Product Overview

Series GKOPLG2 feature an ultra-thin 1.4" profile. Power & CCT Adjustment Controls are standard, allowing the lighting contractor to adjust the power and CCT during installation.



Key Features

CONSTRUCTION:

- Durable galvanized steel plate and extruded aluminum housing in a slim and modern design.

FINISH:

- The exterior is protected by a white rust-resistant baked varnish finish that provides superior resistance to weathering and corrosion.

OPTICS:

- Standard 114° beam angle.
- Light engines are available in standard 3500K, 4000K, and 5000K configurations.
- A range of lumen options available from 2,660 to 5,400 Lumens.
- PS diffuser ensures comfortable light distribution, with no glare or yellowing.

ELECTRICAL:

- Standard 120-277V input voltage.
- Standard 1KV surge protection.
- 0-10V dimming driver(s) as default.
- Flicker-free driver with $\leq 10\%$ stroboscopic index prevents flicker during the lighting and dimming process.
- THD: $\leq 20\%$, Power Factor: $>90\%$.

CONTROLS:

- Power and CCT may be adjusted during installation using switches on the back of the fixture housing. 3500K, 4000K, and 5000K CCT options are available.
- Optional plug & play Bluetooth multi-level motion sensor.
- Emergency battery backup model provides up to 90 minutes of operation at a minimum of 1000lm during outages. During an outage, CCT defaults to 5000K. During regular operation, CCT is available in 3500K, 4000K, and 5000K.
- Bluetooth networked controls that are DLC NLC qualified, utilizing a Bluetooth SIG mesh network operated with IOS, Android, and web, optional for all models.

INSTALLATION:

- Suitable for recessed installation.
- Surface mounting with optional surface mount kit.
- Suspended installation with optional suspension kit

WARRANTY:

- 5 Year Limited Warranty.

LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified.
- UL Damp Location Certified.
- Rated for ambient operating temperature -4°F to 122°F (-20°C to 50°C).

Performance Data


Lumen Output

System Watts	CRI	Size	3500K		4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
25W	82	1'x4'	3325lm*	133lm/W	3575lm	143lm/W	3375lm	135lm/W
30W	82	1'x4'	3870lm*	129lm/W	4170lm	139lm/W	3930lm	131lm/W
40W	82	1'x4'	5000lm	125lm/W	5400lm	135lm/W	5080lm	127lm/W
20W	83	2'x2'	2660lm*	133 lm/W	2860lm	143lm/W	2700lm	135lm/W
25W	83	2'x2'	3225lm*	129lm/W	3475lm	139m/W	3275lm	131lm/W
30W	83	2'x2'	3750lm	125lm/W	4050lm	135lm/W	3810lm	127lm/W
25W	83	2'x4'	3300lm*	132lm/W	3550lm	142lm/W	3350lm	134lm/W
30W	83	2'x4'	3840lm*	128lm/W	4140lm	138lm/W	3900lm	130lm/W
40W	83	2'x4'	4960lm*	124lm/W	5360lm	134lm/W	5040lm	126lm/W

*CCT for indicated wattages is 3400K.


Dimensions & Weight

2'x2' Selectable / Emergency Battery Backup Model

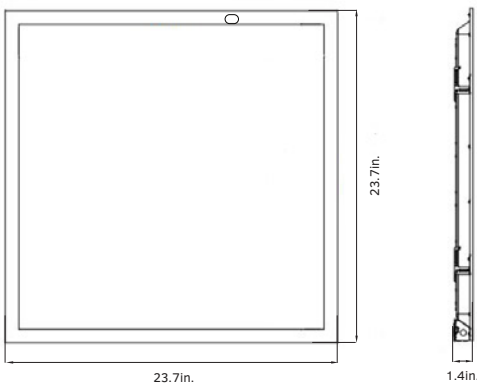


Weight
 Selectable: 4.30lb.
 Emergency Battery Backup Model: 5.30lb.

2'x4' Selectable / Emergency Battery Backup Model

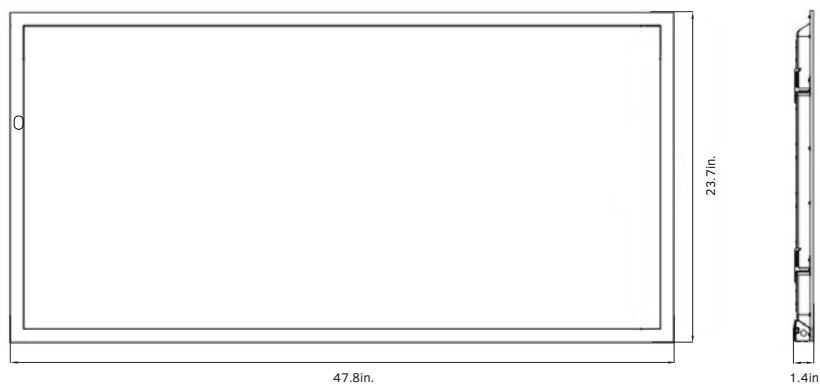

Weight
 Selectable: 8.27lb.
 Emergency Battery Backup Model: 9.27lb.

1'x4' Selectable / Emergency Battery Backup Model

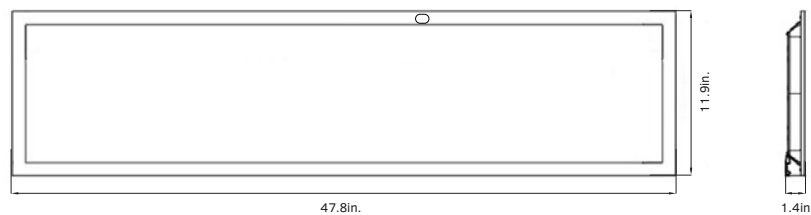


Weight
 Selectable: 4.63lb.
 Emergency Battery Backup Model: 5.63lb.

Accessories



PLUG & PLAY BLUETOOTH MULTI-LEVEL MOTION SENSOR
 Optional plug & play Bluetooth multi-level motion sensor detects occupancy in an area for additional energy savings.



EMERGENCY BATTERY BACKUP MODEL
 Emergency battery backup model provides up to 90 minutes of operation during power outages. During an outage, CCT defaults to 5000K.

Mounting Options



RECESSED MOUNTING (INCLUDED)
 LED Panels are suitable for standard recessed mounting in a grid ceiling, by default.



SURFACE MOUNTING (OPTIONAL)
 Optional surface mounting kit allows for mounting without a ceiling grid (sold separately).



SUSPENSION MOUNTING (OPTIONAL)
 Optional suspension mounting kit allows for mounting without a ceiling grid or in tall spaces (sold separately).

Ordering Information

LED Panel Series GKOPLG2								Example: GKOPLG224B40W27VPCMB						
Fixture Type	Size		Backlit		Wattage		Voltage		CCT		Motion Sensor		Battery Backup	
<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	
GKOPLG2	24	2'x4'	B	Backlit	40W	40W / 30W / 25W	27V	120-277V	PC	Selectable	M	With Motion Sensor	B	With Battery Backup
	14	1'x4'			30W	30W / 25W / 20W					Blank	Without Motion Sensor		Blank
	22	2'x2'												